

## Product information | TECHNICAL DATA SHEET

**MICRO.** The microscopic MTN spray can.  
30 ml: 1 Oz, 28 g.

### GENERAL DESCRIPTION

Very fast-drying, glossy, synthetic enamel that retains its color very well outdoors and provides a perfect finish.

### FEATURES

- Very Fast drying.
- Excellent flexibility.
- Easy to apply and repaint.
- Good hardening.
- Does not contain lead nor other heavy metals.
- Good covering capability.
- High pressure.
- Excellent resistance to the sun and rain.
- Long-lasting gloss and color.
- Very good resistance to UV light (see chart).
- Strong resistance to scratching once the film is polymerized.

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within thirty minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use. If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES

Type of liant:	Modified synthetic
Color:	Black
Shine 60° (ASTM D-523 ISO 2813):	60-90%
Dry to the touch (ASTM D-1640 ISO 1517):	30'
Completely dry (ASTM D-1640 ISO 1517):	24 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 µ/layer
Adherence (ASTM D-3359 ISO 2409):	3 B
Theoretical yield (continuous painting):	0,25 m <sup>2</sup> for 50 ml
Thinner:	Mixture
Product life:	(Well Stored) 5 Years
Repainted:	After 30'
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity . 85% R.H.P
Heat resistance of paint:	Undetermined

\* All of the adherence tests have been carried out on steel plates.

### CAUTION




### APPLICATIONS

Due to the characteristics of this product we recommend its use for touch-ups and painting all types of materials, whether it may be for household use, crafts, fine arts, and generally, where the properties of a high quality spray paint are required

- Graffiti.
- Gardering
- Fine arts
- Bricolaje.
- Aluminum framing
- Sign painting.

### APPEARANCE

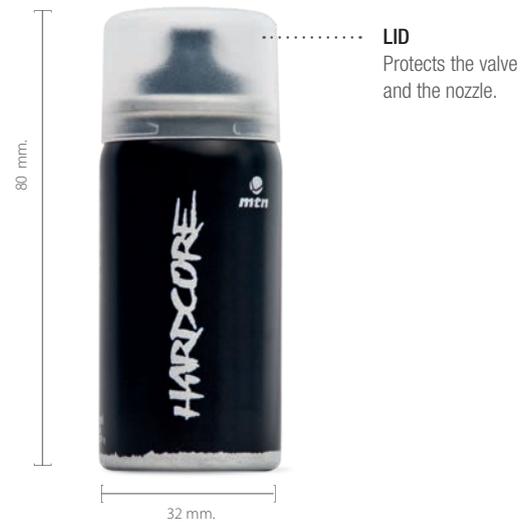

### LABEL



### CAP SYSTEM



### COLORS

